

**Codice - Code:**

**A00048**

Double interlock flexible brass hose

**Descrizione - Description:**

Flessibile ottone doppia aggraffatura 1/2" x 1/2" FF cono girevole incorporato

*Double interlock flexible brass hose, 1/2" x 1/2" FF built-in swivel conical nut*

*Doppelwicklung Brauseschlauch aus Messing 1/2"x 1/2" FF Drehkonus*

*Flexible laiton double agrafage 1/2" x 1/2" FF écrou conique tournant*

*Flexible de latón doble grapado 1/2" x 1/2" HH cónico con racor giratorio antienrollable*


*Шланг из латуни дв. фальцевания 1/2" x 1/2" FF встроенный поворотный наконечник*

**Tecnologia - Technology:**

**Immagine Prodotto - Product Image**




**Disegni - Drawings**

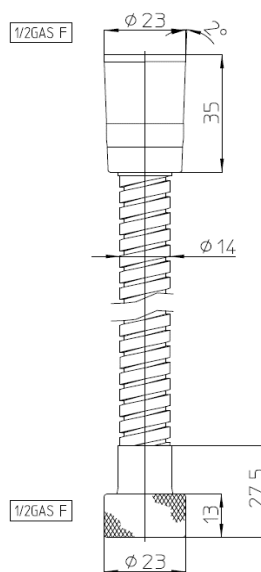

**Grafico di portata - Flow rate diagram**

	rain
0	0,0
0,5	11,5
1	17,1
1,5	21,3
2	25,0
2,5	28,3
3	31,2
3,5	33,1
4	35,1
4,5	37,1
5	38,8
pressione <b>bar</b>	portata <b>L/min</b>

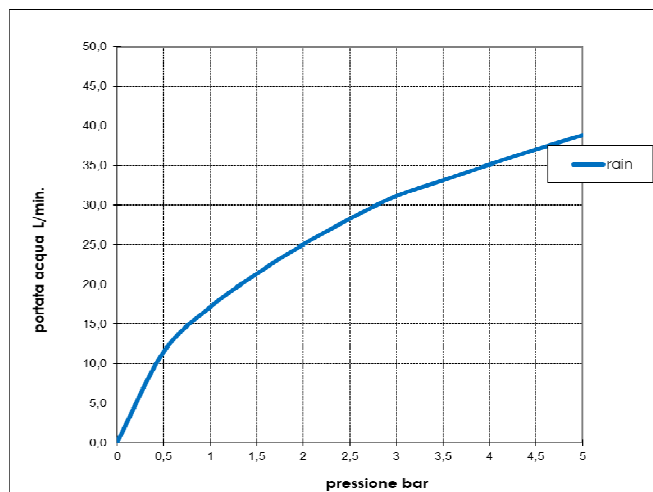

**Caratteristiche idrauliche - Hydraulic features**

	Pressione Pressure	Portata Flow rate
min	1 bar	17 L/min
max	5 bar	39 L/min
Portata minima consigliata per buon funzionamento <i>Recommended minimum flow-rate for optimal performance</i>		n.a.

Solo per miscelatori termostatici Only for thermostatic mixers	
Blocco di sicurezza Safety lock	--
Temperatura acqua fredda Cold water temperature	--
Temperatura acqua calda Hot water temperature	--

## Materiali - Materials

**Flessibile e raccordi:** Ottone**Tubo interno:** PVC**Guarnizioni:** EPDM**Flexible hose and threaded connections:** Brass**Inside hose:** PVC**Gaskets:** EPDM

## Certificazioni - Certifications



## Conformità' - Conformity

**Chrome plating** - EN 248;