

**Codice - Code:**

**C98002**  
Shut-Off Handspray set

**Descrizione - Description:**

Duplex doccia a pulsante in ABS con supporto fisso in ABS e flessibile ottone DA cm 125  
*ABS shut-off handspray set with ABS fixed bracket DI brass hose cm 125*  
*Duschset mit hygienischer Handbrause aus ABS, Brausehalter aus ABS, Brauseschlauch cm 125*  
*Ensemble avec douchette d'arrêt en ABS, support fixe en ABS, double agrafage laiton flexible cm 125*

**Tecnologia - Technology:**




*Conjunto mango ducha en ABS con pulsante de cierre, soporte fijo en ABS, flexible cm 125*  
*Душевой комплект: лейка с клапаном подачи, фиксированный держатель, Шланг 125 см*

**Immagine Prodotto - Product Image**




**Disegni - Drawings**

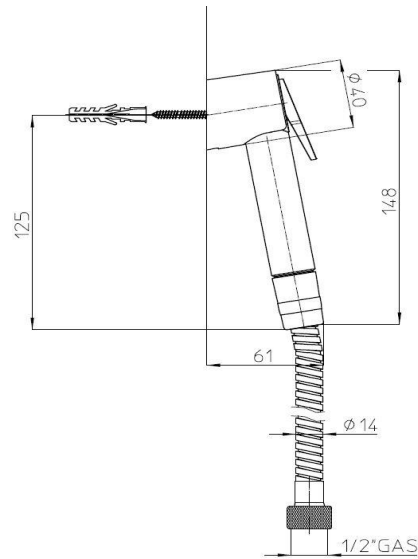

**Grafico di portata - Flow rate diagram**

	RAIN
0	0,0
0,5	7,8
1	10,9
1,5	13,6
2	16,0
2,5	18,1
3	20,1
3,5	22,0
4	23,7
4,5	25,5
5	27,2
pressione <b>bar</b>	portata <b>L/min</b>

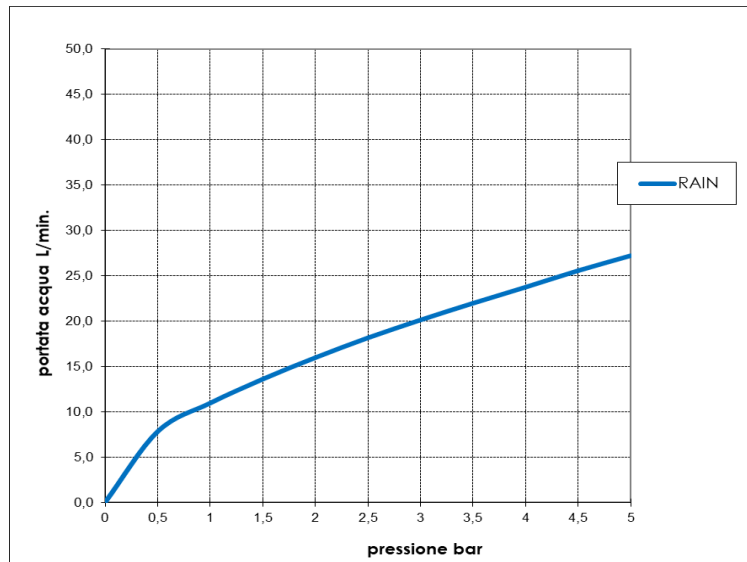

**Caratteristiche idrauliche - Hydraulic features**

	Pressione Pressure	Portata Flow rate
min	1 bar	11 L/min
max	5 bar	27 L/min
Portata minima consigliata per buon funzionamento <i>Recommended minimum flow-rate for optimal performance</i>		10 L/min

Solo per miscelatori termostatici Only for thermostatic mixers	
Blocco di sicurezza Safety lock	--
Temperatura acqua fredda Cold water temperature	--
Temperatura acqua calda Hot water temperature	--

**Materiali - Materials**

**Supporto fisso C98000:** ABS  
**Doccia a pulsante B00442:** ABS  
**Flessibile A03045:** tubo in ottone DA  
  
*Fixed bracket C98000:* ABS  
*Shut-off handspray B00442:* ABS  
*Shower hose A03045:* double intrlock brass

**Certificazioni - Certifications**

**B00442:**



**A03045:**



**Conformità' - Conformity**

Chrome plating - EN248