

	SCHEDA TECNICA TECHNICAL SHEET	Date: 07/05/2018	Rev/0

Codice / Code: D59001	Descrizione / description: Asta murale in ottone cm 110 Ø 20 mm con supporti regolabili, interasse massimo cm 94, doccia Dinamica Ø140 e flessibile ottone doppia aggraffatura cm 175. <i>Cm 110 Ø 20 mm brass slide rail with adjustable brackets, maximum fixation distance cm 94, Dinamica Ø140 handshower and double interlock brass flexible hose cm 175.</i>
--	---


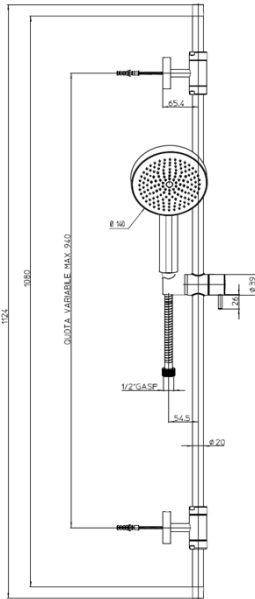
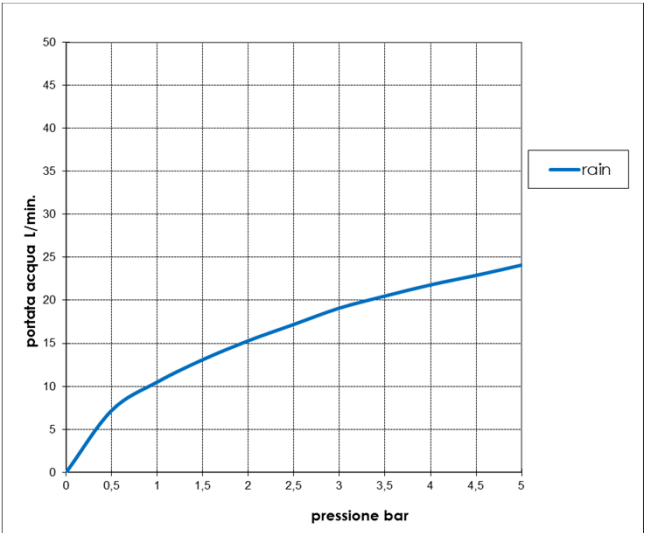
Foto / image 	Disegni / drawings 
--	---

Grafico di portata / Flow rate diagram																									
<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>7,2</td></tr> <tr><td>1</td><td>10,5</td></tr> <tr><td>1,5</td><td>13,1</td></tr> <tr><td>2</td><td>15,3</td></tr> <tr><td>2,5</td><td>17,2</td></tr> <tr><td>3</td><td>19,1</td></tr> <tr><td>3,5</td><td>20,5</td></tr> <tr><td>4</td><td>21,8</td></tr> <tr><td>4,5</td><td>22,9</td></tr> <tr><td>5</td><td>24,1</td></tr> </tbody> </table>			rain	0	0	0,5	7,2	1	10,5	1,5	13,1	2	15,3	2,5	17,2	3	19,1	3,5	20,5	4	21,8	4,5	22,9	5	24,1
	rain																								
0	0																								
0,5	7,2																								
1	10,5																								
1,5	13,1																								
2	15,3																								
2,5	17,2																								
3	19,1																								
3,5	20,5																								
4	21,8																								
4,5	22,9																								
5	24,1																								

MATERIALI / materials <i>Slide Rail D59000 : Brass - Shower B00166 : plastic body (ABS), Insert and flange (POM), EPDM diffuser, rubber gasket (NBR). Hose A03045: Brass tube and connectors, PVC inner tube, Rubber (EPDM) Gaskets</i>
--

CARATTERISTICHE IDRAULICHE / hydraulic features				<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>	
	pressione pressure	portata flow rate	temperatura temperature	Blocco di sicurezza safety lock	/
min	1 bar	/	/	Temperatura acqua fredda cold water temperature	/
max	5 bar	/	<70°C	Temperatura acqua calda hot water temperature	/
consigliata recommended	2-3 bar	9 L/min	/		

CERTIFICAZIONI / CERTIFICATIONS: <i>Shower B00166 : ACS (FRA); NF [EN1113] (FRA); IAPMO/CSA [ASME A112.18.1/CSA B125.1]; Watermark [AS/NZS 3662:2005] (AUS); Hose A03045: ACS (FRA); NF [EN1113] (FRA);</i>
CONFORMITA' / CONFORMITY: <i>Chrome plating - EN 248</i>