

	SCHEDA TECNICA TECHNICAL SHEET	Date: 26/03/2018	Rev 0

Codice / Code: Z00103 + Z00002	Parti incasso miscelatore termostatico deviatore 3 Vie da 1/2" Concealed parts thermostatic mixer 3 Ways 1/2" diverter
---	---

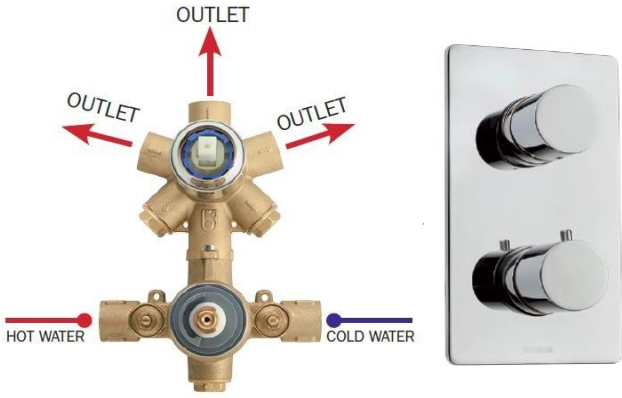
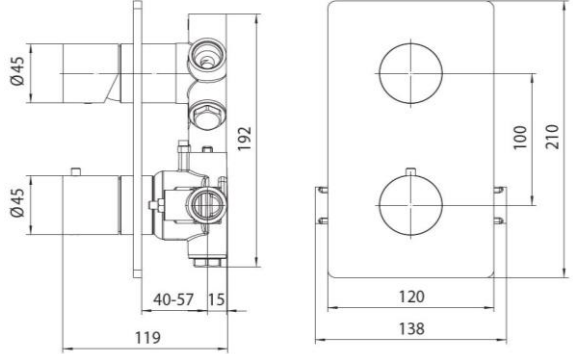
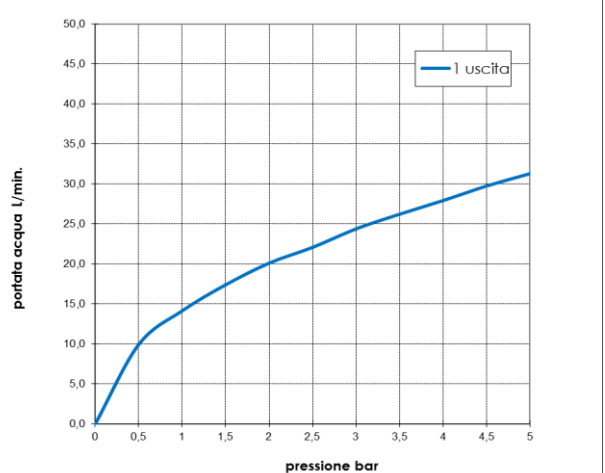
Foto / image  <p style="text-align: center;">Z00103 Z00002</p>	Disegni / drawings 
--	---

Grafico di portata / Flow rate diagram																																																	
<table border="1"> <thead> <tr> <th></th> <th>1 uscita</th> </tr> </thead> <tbody> <tr><td>0</td><td>0,0</td></tr> <tr><td>0,5</td><td>9,9</td></tr> <tr><td>1</td><td>14,2</td></tr> <tr><td>1,5</td><td>17,4</td></tr> <tr><td>2</td><td>20,1</td></tr> <tr><td>2,5</td><td>22,1</td></tr> <tr><td>3</td><td>24,4</td></tr> <tr><td>3,5</td><td>26,2</td></tr> <tr><td>4</td><td>27,9</td></tr> <tr><td>4,5</td><td>29,7</td></tr> <tr><td>5</td><td>31,3</td></tr> </tbody> </table>			1 uscita	0	0,0	0,5	9,9	1	14,2	1,5	17,4	2	20,1	2,5	22,1	3	24,4	3,5	26,2	4	27,9	4,5	29,7	5	31,3	<table border="1"> <thead> <tr> <th>pressione bar</th> <th>portata L/min</th> </tr> </thead> <tbody> <tr><td>0</td><td>0,0</td></tr> <tr><td>0,5</td><td>9,9</td></tr> <tr><td>1</td><td>14,2</td></tr> <tr><td>1,5</td><td>17,4</td></tr> <tr><td>2</td><td>20,1</td></tr> <tr><td>2,5</td><td>22,1</td></tr> <tr><td>3</td><td>24,4</td></tr> <tr><td>3,5</td><td>26,2</td></tr> <tr><td>4</td><td>27,9</td></tr> <tr><td>4,5</td><td>29,7</td></tr> <tr><td>5</td><td>31,3</td></tr> </tbody> </table>	pressione bar	portata L/min	0	0,0	0,5	9,9	1	14,2	1,5	17,4	2	20,1	2,5	22,1	3	24,4	3,5	26,2	4	27,9	4,5	29,7	5
	1 uscita																																																
0	0,0																																																
0,5	9,9																																																
1	14,2																																																
1,5	17,4																																																
2	20,1																																																
2,5	22,1																																																
3	24,4																																																
3,5	26,2																																																
4	27,9																																																
4,5	29,7																																																
5	31,3																																																
pressione bar	portata L/min																																																
0	0,0																																																
0,5	9,9																																																
1	14,2																																																
1,5	17,4																																																
2	20,1																																																
2,5	22,1																																																
3	24,4																																																
3,5	26,2																																																
4	27,9																																																
4,5	29,7																																																
5	31,3																																																

MATERIALI / materials OTTONE/ZAMA - BRASS/ZAMA
--

CARATTERISTICHE IDRAULICHE / hydraulic features				
	pressione pressure	portata flow rate	temperatura temperature	<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>
min	0,5bar	--	--	Blocco di sicurezza safety lock 38°C
max	5bar	--	--	Temperatura acqua fredda cold water temperature ≤ 25°C
consigliata recommended	2-3 bar	--	--	Temperatura acqua calda hot water temperature ≥ 55°C ÷ ≤ 65°C

CERTIFICAZIONI / CERTIFICATIONS CONFORMITA' / CONFORMITY UNI EN 1111
--