

Codice - Code:

A00048

Double interlock flexible brass hose

Descrizione - Description:

Flessibile ottone doppia aggraffatura 1/2" x 1/2" FF cono girevole incorporato

Double interlock flexible brass hose, 1/2" x 1/2" FF built-in swivel conical nut

Doppelwicklung Brauseschlauch aus Messing 1/2"x 1/2" FF Drehkonus

Flexible laiton double agrafage 1/2" x 1/2" FF écrou conique tournant

Flexible de latón doble grapado 1/2" x 1/2" HH cónico con racor giratorio antienrollable

Шланг из латуни дв. фальцевания 1/2" x 1/2" FF встроенный поворотный наконечник

Tecnologia - Technology:

Immagine Prodotto - Product Image



Disegni - Drawings


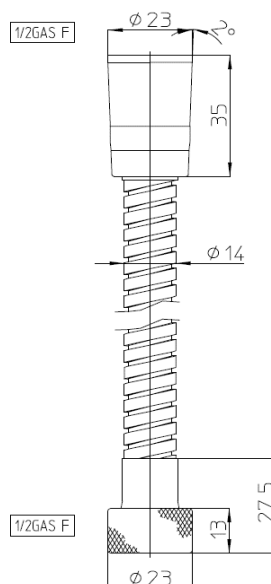


Grafico di portata - Flow rate diagram

	rain
0	0,0
0,5	11,5
1	17,1
1,5	21,3
2	25,0
2,5	28,3
3	31,2
3,5	33,1
4	35,1
4,5	37,1
5	38,8
pressione bar	portata L/min

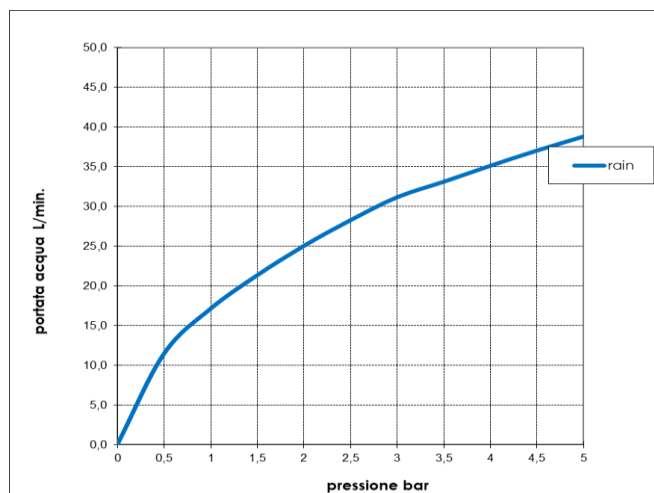

Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate
min	1 bar	17 L/min
max	5 bar	39 L/min
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performance		n.a.

Solo per miscelatori termostatici Only for thermostatic mixers	
Blocco di sicurezza Safety lock	--
Temperatura acqua fredda Cold water temperature	--
Temperatura acqua calda Hot water temperature	--

Materiali - Materials

Flessibile e raccordi: Ottone**Tubo interno:** PVC**Guarnizioni:** EPDM**Flexible hose and threaded connections:** Brass**Inside hose:** PVC**Gaskets:** EPDM

Certificazioni - Certifications



Conformità' - Conformity

Chrome plating - EN 248; **Flexible:** EN1113