
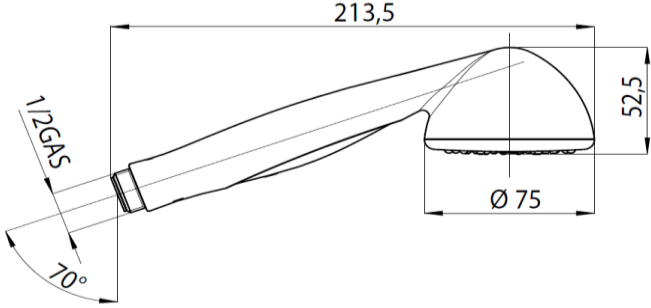
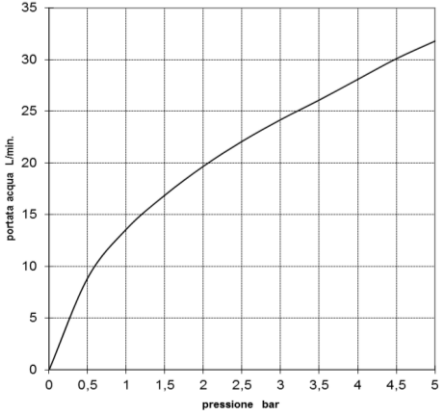


| BOSSINI | | SCHEDA TECNICA TECHNICAL SHEET | | Date: 24/07/2017 | Rev/0 | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------------------|---|----------------------------|---|-------|-----|-----|---|------|-----|------|---|------|-----|------|---|------|-----|------|---|------|-----|------|---|------|----------------------|----------------------|--|--|--|--|
| Codice / Code: B00141 | | Descrizione / description: Doccia monogetto Single function handshower | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Foto / image | | Disegni / drawings | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Grafico di portata / Flow rate diagram | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>8,9</td></tr> <tr><td>1</td><td>13,6</td></tr> <tr><td>1,5</td><td>16,9</td></tr> <tr><td>2</td><td>19,7</td></tr> <tr><td>2,5</td><td>22,1</td></tr> <tr><td>3</td><td>24,2</td></tr> <tr><td>3,5</td><td>26,1</td></tr> <tr><td>4</td><td>28,1</td></tr> <tr><td>4,5</td><td>30,1</td></tr> <tr><td>5</td><td>31,8</td></tr> <tr> <td>pressione bar</td> <td>portata L/min</td> </tr> </tbody> </table> | | | rain | 0 | 0 | 0,5 | 8,9 | 1 | 13,6 | 1,5 | 16,9 | 2 | 19,7 | 2,5 | 22,1 | 3 | 24,2 | 3,5 | 26,1 | 4 | 28,1 | 4,5 | 30,1 | 5 | 31,8 | pressione bar | portata L/min | | | | |
| | rain | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0,5 | 8,9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 13,6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1,5 | 16,9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 19,7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2,5 | 22,1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 24,2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3,5 | 26,1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 28,1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4,5 | 30,1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 31,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| pressione bar | portata L/min | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MATERIALI / materials | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ABS, Silicone, Nbr, Acetal | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CARATTERISTICHE IDRAULICHE / hydraulic features | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | pressione pressure | portata flow rate | temperatura temperature | solo per miscelatori termostatici only for thermostatic mixers | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| min | 1 bar | -- | -- | Blocco di sicurezza safety lock | / | | | | | | | | | | | | | | | | | | | | | | | | | | |
| max | 5 bar | -- | <70°C | Temperatura acqua fredda cold water temperature | / | | | | | | | | | | | | | | | | | | | | | | | | | | |
| consigliata recommended | 2-3 bar | -- | <42°C | Temperatura acqua calda hot water temperature | / | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CERTIFICAZIONI / CERTIFICATIONS: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ACS(FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CONFORMITA' / CONFORMITY : | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Chrome plating - EN 248. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |