
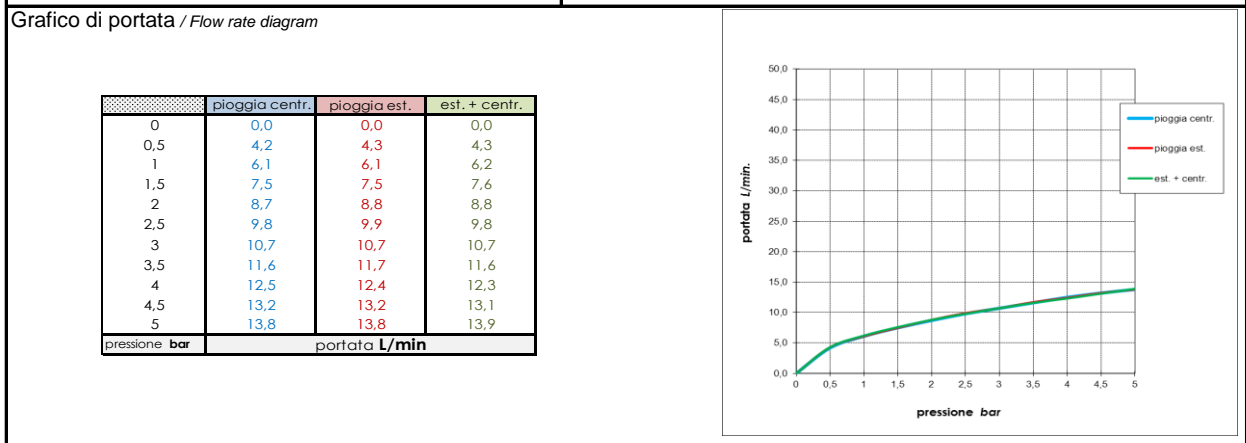


	SCHEDA TECNICA TECHNICAL SHEET	Date: 31/07/2018	Rev/0

Codice / Code: D48006	Descrizione / description: Asta murale FLAT in ottone cm 110 con supporti a muro regolabili (interasse massimo cm 100), supporto a muro inferiore c/presa acqua incorporata - doccia Mixa/3 Ø140 mm - flessibile cromolux cm 150 Cm 110 FLAT brass slide rail with adjustable brackets (maximum fixation distance cm 100), lower bracket w/built-in water outlet - Mixa/3 Ø140 mm handshower - Cromolux flexible hose cm 150
--	---

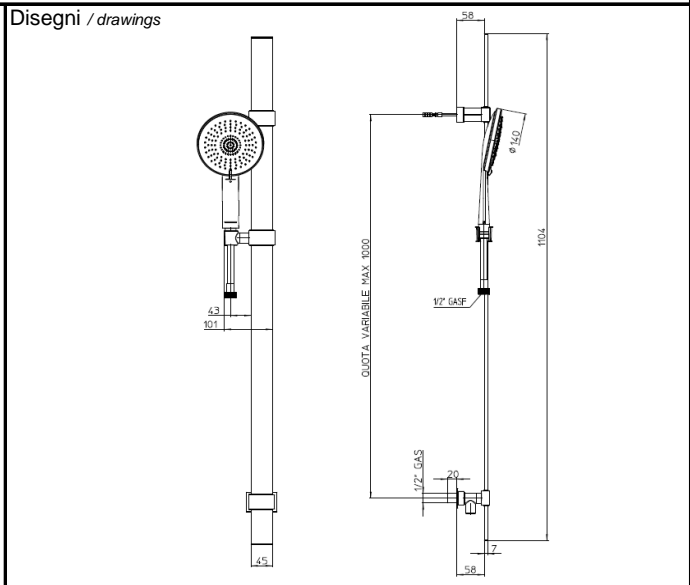

MATERIALI / materials

Saliscendi D48000: asta in ottone; centrale in ottone e plastica (ABS, POM); supporto in ottone, rosone in plastica (ABS); **Doccia B00168:** plastica (ABS, POM, PBT), diffusore in silicone, guarnizioni in gomma (NBR, EPDM); **Flessibile A00158:** PVC rinforzato nylon, raccordi in ottone cromato, guarnizioni in EPDM.

Slide Rail D48000: Brass slide rail, slider by brass and plastic (ABS, POM); brass bracket, plastic (ABS) wall rosette; **Handshower B00168:** Plastic (ABS, POM, PBT), silicone diffuser, rubber gaskets (NBR, EPDM); **Hose A00158:** Nylon reinforced PVC tube, connectors by chrome plated brass, EPDM gaskets.

CARATTERISTICHE IDRAULICHE / hydraulic features

	pressione pressure	portata flow rate	temperatura temperature	<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>	
min	1 bar	--	--	Blocco di sicurezza safety lock	/
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/
consigliata recommended	2-3 bar	7,5 L/min	--	Temperatura acqua calda hot water temperature	/

CERTIFICAZIONI / CERTIFICATIONS:

Handshower B00168: IAPMO [ASME A112.18.1/CSA B125.1] (US/CAN); CSA [ASME A112.18.1/CSA B125.1] (CAN/US); ACS (FRA); Watermark (AUS); **Hose A00158:** ACS (FRA); NF [EN 1113] (FRA).

CONFORMITA' / CONFORMITY :

Chrome Plating: EN 248; Handshower: EN 1112